

GEE[®]

TRAMP

Owner's & User's Manual

Safety Information, Installation and Care & Maintenance Instructions

Trampoline Wind Anchor Kit



Warning: Read this manual before assembling and using the Wind Anchor kit



Warning: Beware of underground services prior to installation to avoid damage to services such as Gas, Electricity, Water and Sewers.

CONTENTS



4 x Star Pickets (A)



4 x Caps (B)



4 x Ratchet Straps (C)



4 x Top Straps (D)

INSTALLATION

Step 1

Ensure the trampoline is in the desired location and is on level ground.


Step 2

Measure and place the star picket approximately 300-350mm inwards of the trampoline frame to prevent tipping hazards. Place the rest of the star pickets (A) evenly spaced around the frame to share the wind load. **Tip:** If possible align the star pickets as close as you can with the strong vertical zones of the legs.



Step 3

Place the Star Picket (A) on a slight angle, leaning inward with the top hole facing outwards as shown below.

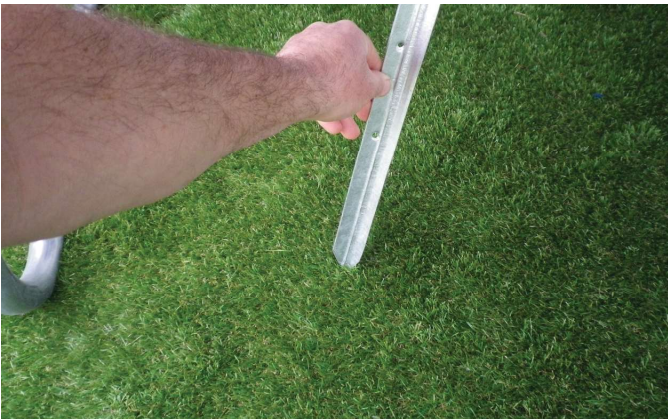

Step 4

Using a suitable hammer install the star picket (A) into the ground until there is approximately 55-60mm showing above the ground.



Step 5

Place the yellow Safety cap (B) on top of the star picket.



Step 6

Place the Ratchet Strap Steel Hook (C) through the Star Picket/Yellow Safety Cap.



Step 7

Thread top strap (D) in between the trampoline safety pads and the trampoline frame.



Step 8

Thread the top strap (D) through the loop at the end of the strap and pull all strapping through.



Step 9

Thread the top strap (D) through the ratchet device and tension. Aim for a firm strap tensions but don't over tighten. Tidy the remaining loose strapping and repeat steps to complete for all 4 anchors.



CARE & MAINTENANCE

- Inspect strap integrity to ensure there are no frays or cuts
- Check all Star pickets are firm in the ground and re-tension the ratchet as required